
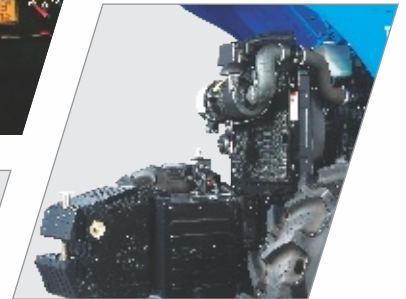


SONALIKA

HEAVY DUTY TRACTOR RANGE «FOR YOUR FIELD»

60 HP



3 CYLINDER TURBOCHARGED
WITH INTERCOOLER

CONSTANT MESH
TRANSMISSION

HEAVY LIFT
CAPACITY

TWIN PROJECTOR
HEADLAMPS

HEAVY DUTY
2WD/4WD



**COST
EFFICIENT**

MECHANICAL TRACTORS

MADE OF

**REAL
STEEL**

**STRATEGIC
COLLABORATION
WITH**

YANMAR

HEAVY DUTY TRACTOR RANGE «FOR YOUR FIELD»

60 HP

SONALIKA



FEATURES	Sonalika 60 HP (4cyl.)
ENGINE	
Engine Type	4100 FL
HP Category	60
No. of Cylinders	4
Aspiration	Turbo Charged
Cubic Capacity (cc)	2780
Rated RPM	2100
Air Cleaner	Dry Type
Max Torque (Nm)	230Nm @ 1300 erpm
Exhaust	Upward Exhaust
Muffler	Under-hood
TRANSMISSION	
Drive	4WD
Clutch	Dual Clutch, Dry Friction Plate
Gearbox	8F+2R
Front Axle	2WD/4WD
Transmission	Swift Shift
SPEED (FORWARD)	
Maximum Speed (Km/Hr)	32.79 @ 2100 erpm
Minimum Speed (Km/Hr)	2.50@ 2100 erpm
BRAKES	
Brakes	Oil Immersed Brake
Type of Actuation	Mechanical (Ind)
Parking Brake	Independent Type
DIFFERENTIAL LOCK	
Differential Lock	Mechanical, Foot Operated
PTO	
PTO (RPM)	540 @1680 erpm
PTO (Actuation)	Mechanical
STEERING	
Steering	Power
ELECTRICAL	
Battery	12V, 88Ah / 110Ah
Alternator	12V, 36Amp
Seven Pin Trailer Socket	Output 12V
HYDRAULICS	
3 Point Linkage	CAT-II
Stay Bars	Adjustable
Hydraulic Lifting Capacity (Kg)	2000
Auxiliary Hydraulic Circuit	1SA + 1DA
Lift Rods	Adjustable

FEATURES	Sonalika 60 HP (4cyl.)
SAFETY SWITCH	
Clutch Safety Switch	Standard
PTO Safety Switch	Standard
Neutral Safety Switch	Standard
CAPACITY (Ltrs.) (+/-5%)	
Fuel Tank (Ltr.)	65
TURNING RADIUS	
Without Brakes (m)	4.7
TYRE	
Front	9.50x24
Rear	16.9x30
DIMENSION & WEIGHT (+/-5%)	
Weight (Kg)	2954
Wheel Base (mm)	2350
Total Length (mm)	3980
Total Width (mm)	1790-1950
Height (mm) Up to ROPS	2650
Min. Ground Clearance (mm)	360
Front Track (mm)	1295-1650
Rear Track (mm)	1420-1880
OTHERS	
Fuel Indicator Gauge	Standard
Front Tow Hook	Standard, Inbuilt in Front Weights
Front Weights with Std. Ballast	Front Weight 30*2+25*4 (4WD) Front Weight 51+6*29 (2WD)
Trailer Hitch	Swinging Draw Bar
ROPS with Canopy	Standard
OPTIONAL FEATURES	
Cabin	Optional
Tyre	2WD Front Tyre: 7.5x16 Rear Tyre: 16.9x28 2WD Front Tyre: 7.5x16 Rear Tyre: 16.9x30

*Data and specifications are subject to change without any advance notice due to continuous product improvement and development. All Dimensions are with standard tyres.

DEALER STAMP



INTERNATIONAL TRACTORS LIMITED

International Business Office: Teri School of Advanced Studies, Plot No.10, Institutional Area, Vasant Kunj, New Delhi-110070 (India)

Phone: +91 11 66 45 5200 | Work: Jalandhar Road, Hoshiarpur - 146022, Punjab (India) | Phone: +91-01882-522220/ 522221

Fax:+91- 01882-522222 | Email: exports@sonalika.com | URL: www.international.sonalika.com