

SONALIKA

HEAVY DUTY TRACTOR RANGE «FOR YOUR FIELD»

60 HP



AGILE HIGH BACKUP
TORQUE ENGINE

CONSTANT MESH
TRANSMISSION

HEAVY LIFT
CAPACITY

TWIN PROJECTOR
HEADLAMPS

HEAVY DUTY
2WD/4WD



**COST
EFFICIENT**
MECHANICAL TRACTORS

MADE OF
**REAL
STEEL**

STRATEGIC
COLLABORATION
WITH
YANMAR

HEAVY DUTY
TRACTOR RANGE
FOR YOUR FIELD

60 HP

SONALIKA




FEATURES	Sonalika 60 HP
ENGINE 	
Engine Type	4100 FL
HP Category	60
No. of Cylinders	4
Aspiration	Natural
Cubic Capacity (cc)	3707
Rated RPM	2200
Air Cleaner	Dry Type with Clogging Sensor
Cold Start	Standard
Max Torque (Nm)	230Nm @ 1200 erpm
Exhaust	Elliptical Exhaust
TRANSMISSION 	
Drive	4WD
Clutch	Dual Clutch
Gearbox	8F+2R
Transmission	Swift Shift
SPEED (FORWARD) 	
Maximum Speed (Km/Hr)	36.46 @ 2200
Minimum Speed (Km/Hr)	1.95 @ 2200
BRAKES 	
Brakes	Oil Immersed Brake
Type of Actuation	Mechanical
Parking Brake	Independent
DIFFERENTIAL LOCK 	
Differential Lock	Mechanical, Foot Operated
PTO 	
PTO (RPM)	540
PTO (Actuation)	Mechanical
STEERING 	
Steering	Power
ELECTRICAL 	
Battery	12V, 110/88 Ah
Alternator	12V, 36Amp
Seven Pin Trailer Socket	Standard
HYDRAULICS 	
3 Point Linkage	CAT-II
Stay Bars	Adjustable
Hydraulic Lifting Capacity (kg)	2000
Auxiliary Hydraulic Circuit	2DA
Lift Rods	Standard

FEATURES	Sonalika 60 HP
SAFETY SWITCH 	
Clutch Safety Switch	Standard
PTO Safety Switch	Standard
Neutral Safety Switch	Standard
CAPACITY (Ltrs.) (+/-5%) 	
Fuel Tank (Ltr.)	65
TYRE 	
Front	9.50x24
Rear	16.9x30
DIMENSION & WEIGHT (+/-5%) 	
Weight (kg)	3155
Wheel Base (mm)	2310
Total Length (mm)	4190
Total Width (mm)	1980
Height (mm) Up to ROPS	2710
Min. Ground Clearance (mm)	390
Front Track (mm)	1670
Rear Track (mm)	1500
OTHERS 	
Fuel Indicator Gauge	Standard
Front Tow Hook	Inbuilt in Front Weights
Front Weights with Std. Ballast (kg)	Front Weight 30x2+25x4 (4WD) Front Weight 51+6x29 (2WD)
Trailer Hitch	Swinging Draw Bar
ROPS	Standard
Canopy	Standard
OPTIONAL FEATURES 	
Cabin	Optional
Tyre	4WD Front Tyre: 11.2x24 Rear Tyre: 16.9x30
	4WD Front Tyre: 9.5x24 Rear Tyre: 16.9x28
	2WD Front Tyre: 7.5x16 Rear Tyre: 16.9x28

*Data and specifications are subject to change without any advance notice due to continuous product improvement and development. All Dimensions are with standard tyres.

DEALER STAMP

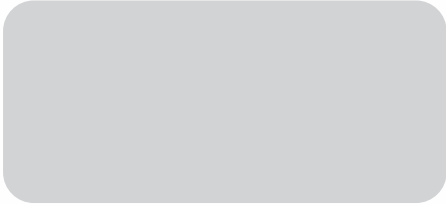

INTERNATIONAL TRACTORS LIMITED

International Business Office: Teri School of Advanced Studies, Plot No.10, Institutional Area, Vasant Kunj, New Delhi-110070 (India)
Phone: +91 11 66 45 5200 | Work: Jalandhar Road, Hoshiarpur - 146022, Punjab (India) | Phone: +91-01882-522220/ 522221
Fax:+91- 01882-522222 | Email: exports@sonalika.com | URL: www.international.sonalika.com