


# SONALIKA

— THE TOUGHEST —  
**PERFORMER**  
« FOR YOUR FIELD »

**50**

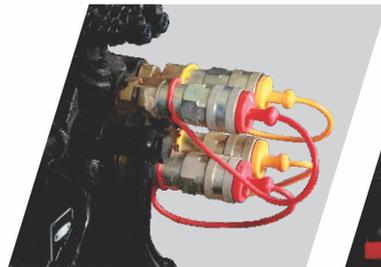

AGILE HIGH BACKUP  
TORQUE ENGINE

8F+2R SWIFT SHIFT  
TRANSMISSION®

HEAVY LIFT  
CAPACITY

EASY FRONT AND  
LOADER ATTACHMENT

HEAVY DUTY  
2WD/4WD



**COST  
EFFICIENT**  
MECHANICAL TRACTORS

MADE OF  
**REAL  
STEEL**

STRATEGIC  
COLLABORATION  
WITH  
**YANMAR**

**THE TOUGHEST  
PERFORMER  
«FOR YOUR FIELD»**

**S50**

**SONALIKA**



FEATURES	S 50
Model Description	Sonalika-50
<b>ENGINE</b>	
Engine Type	Three Cylinder Natural Aspirated Engine
HP Category	50
No. of Cylinders	3
Aspiration	Natural
Cubic Capacity (cc)	3067
Rated RPM	2100
Air cleaner	Dry Air Cleaner with Clogging sensor
Cold Start	Standard
Max Torque (nm) (+/-5%)	205@1200 ±100RPM
Exhaust	Underhood Downdraft silencer Underhood Upward
<b>TRANSMISSION</b>	
Drive	2WD/4WD
Clutch	Dual Clutch
Gearbox	8F+2R
Front Axle	4WD
Transmission	Swift Shift
<b>SPEED (FORWARD)</b>	
Maximum Speed (Km/Hr)	29.94@2100
Minimum Speed (Km/Hr)	2.27@2100
<b>BRAKES</b>	
Brakes	Oil Immersed Brake
Type of actuation	Mechanical
Parking Brake	Independent Type
<b>DIFFERENTIAL LOCK</b>	
Differential lock	Yes, Foot Operated
<b>PTO</b>	
PTO (rpm)	540
PTO (actuation)	Mechanical
<b>STEERING</b>	
Steering	Power
<b>ELECTRICAL</b>	
Battery	12V, 88 Ah
Alternator	12V, 90 Amp
Seven pin trailer socket	Standard
<b>HYDRAULICS</b>	
3 point linkage	CAT-II
Stay Bars	Adjustable
Hydraulic lifting capacity	1600 kg
Auxiliary hydraulic circuit	2DA
Lift rods	Standard

FEATURES	S 50
<b>SAFETY SWITCH</b>	
Clutch Safety Switch	Standard
PTO Safety Switch	Standard
Neutral Safety Switch	Standard
<b>CAPACITY (LTRS)(+/-5%)</b>	
Fuel tank (Lit)	65
<b>TURNING RADIUS</b>	
Without Brakes (m)	3.7
<b>TYRE</b>	
Front	9.5-20
Rear	13.6-28
<b>DIMENSION &amp; WEIGHT(+/-5%)</b>	
Weight(kg)	2780
Wheel Base (mm)	2175
Total Length (mm)	3936
Total Width (mm)	1785
Height (mm) Up to ROPS	2488
Min Ground Clearance (mm)	293
Front Track (mm)	1535
Rear Track (mm)	1420
<b>OTHERS</b>	
Fuel Indicator gauge	Standard
Front Tow Hook	Inbuilt in front weight
Front weights with std. Ballast	30X2+25X4
Trailer Hitch	Swinging Drawbar
ROPS	Standard
<b>OPTIONAL FEATURES</b>	
Tyres (Radial Tyre)	Front 250/85R20, Rear 340/85R28
Cabin	Optional
2WD Front Tyre	7.5-16

\*Since product improvement is a continuous process, specification and details provided are subject to change without prior notice. E&OE, Please correlate with latest updates, accessories shown may not be part of standard product.

DEALER STAMP



SONALIKA S50 AF

**INTERNATIONAL TRACTORS LIMITED**

International Business Office: Teri School of Advanced Studies, Plot No.10, Institutional Area, Vasant Kunj, New Delhi-110070 (India)

Phone: +91 11 66 45 5200 | Work: Jalandhar Road, Hoshiarpur - 146022, Punjab (India) | Phone: +91 1882 302220, 302221

Fax: +91 1882 302293 | Email: exports@sonalika.com | URL: www.sonalika.com/www.solisworld.com