SONALIKA

• HEAVY DUTY - • TRACTOR RANGE • * FOR YOUR FIELD >>> •

DI-75 RX





AGILE HIGH BACKUP TORQUE ENGINE

8F+2R TRANSMISSION®

HEAVY LIFT CAPACITY

EASY FRONT AND LOADER ATTACHMENT

HEAVY DUTY 2WD/4WD














DI-75

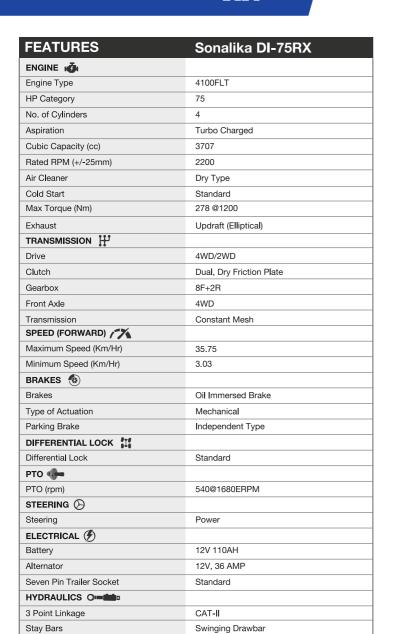

2000

1SA/1DA

Standard

Hydraulic Lifting Capacity (Kg)

Auxiliary Hydraulic Circuit

Lift rods

SONALIKA



FEATURES	Sonalika DI-75RX
	Solialika Di-75hA
SAFETY SWITCH	
Neutral Safety Switch	Standard
CAPACITY (LTRS)(+/-5%)	
Fuel tank (Ltr.)	65
TYRE	
Front	7.5-16
Rear	16.9-30
DIMENSION & WEIGHT(+/-5%)	
Weight (Kg)	2610
Wheel Base (mm)	2210
Total Length (mm)	3740
Total Width (mm)	1910-2250
Height (mm) Up to ROPS	1770 (Steering), 2400 with Exhaust
Min Ground Clearance (mm)	385
Front Track (mm)	1360-1710
Rear Track (mm)	1455-1785
OTHERS	
Fuel Indicator Gauge	Standard
Front Toe Hook	Standard, Inbuilt in Front Weight
Front & Rear Weights With Std. Ballast	Front-72 Kg Base Wt+6x31,
	Rear-1x34 on Each Wheel
Trailer Hitch	Swinging Drawbar

"Since product improvement is a continuous process, specification and details provided are subject to change without prior notice. E&OE, Please correlate with latest updates, accessories shown may not be part of standard product.

DEALER STAMP

