

CULTIVATOR

MINI RIGID & SPRING LOADED














SALIENT FEATURES

- Robust frame
- Heavy duty forged tyne
- Heavy duty springs to absorb sudden impact
- Superior powder coated paint

MINI RIGID & SPRING LOADED CULTIVATOR

Cultivators stir and separates the soil, either before planting (to aerate the soil and prepare a smooth, loose seedbed) or after the crop has begun growing (to kill weeds—controlled disturbance of the topsoil).

TECHNICAL SPECIFICATIONS


	 Model Name	 Frame (mm)	 Tynes (mm)	 Linkage 3 Points (mm)	 Shovel (mm)	 Length (mm)	 Width of cut (mm)	 Width (mm)	 Height (mm)	 Weight (Kg. approx)	 Tractor Power (HP)
Mini Rigid	SL-CL-M5	50X50X5 Sq	22	50x10	8 (EN-45)	1135	965	704	845	63	20-24
	SL-CL-M7	50X50X5 Sq	22			1590	1445			67	26-30
Mini Spring Loaded	SL-CL-MS5	50X50 Tubular	22x19 (Forged)			1135	965	834	930	140	20-24
	SL-CL-MS7	50X50 Tubular	22x19 (Forged)			1640	1425			170	26-30



HEAVY DUTY SPRING FOR TOUGH OPERATIONS



TYNES DESIGNED FOR TOUGH OPERATIONS MADE FROM BORON STEEL

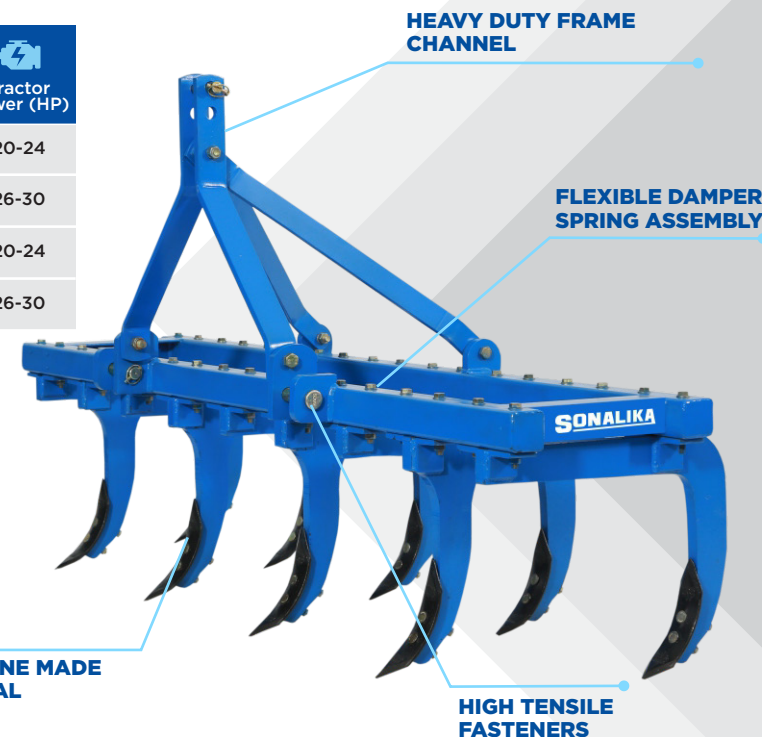

SONALIKA

INTERNATIONAL TRACTORS LIMITED

International Business Office: Teri School of Advanced Studies, Plot No.10, Institutional Area, Vasant Kunj, New Delhi-110070 (India)
 Phone: +91 11 66 45 5200 | Work: Jalandhar Road, Hoshiarpur - 146022, Punjab (India) | Phone: +91 1882 302220, 302221
 Fax: +91 1882 302293 | Email: exports@sonalika.com | URL: www.international.sonalika.com

Auth. Dealer

CULTIVATOR

SPRING LOADED & RIGID TYPE









SALIENT FEATURES

- Robust frame
- Heavy duty forged tyne
- Heavy duty springs to absorb sudden impact
- Superior powder coated paint

SPRING LOADED & RIGID TYPE

Cultivators stir and separates the soil, either before planting (to aerate the soil and prepare a smooth, loose seedbed) or after the crop has begun growing (to kill weeds—controlled disturbance of the topsoil).

TECHNICAL SPECIFICATIONS

	 Model Name	 Frame (mm)	 Tynes (mm)	 Linkage 3 Points (mm)	 Weight (Kg. approx)	 Tractor Power (HP)
Cultivator Medium/Heavy Duty	SL-CL-MH9	100 X 50 (Channel)	50X25 (Forged)	50X16 (Rear) 65X16 (Front)	290	45+
	SL-CL-MH11				370	50+
	SL-CL-MH13				440	55+
	SL-CL-MH15				520	75+
Cultivator rigid type	SL-CL-R9	Sq. 72X72X4.8	20		190	40+
	SL-CL-R11	Sq. 72X72X4.8	20		220	50+




SPECIALLY DESIGNED FOR TOUGHEST OPERATIONS



BEST SUITABLE HARD SOIL CONDITIONS



SUPERIOR POWDER COATED PAINT PREVENT FROM RUST

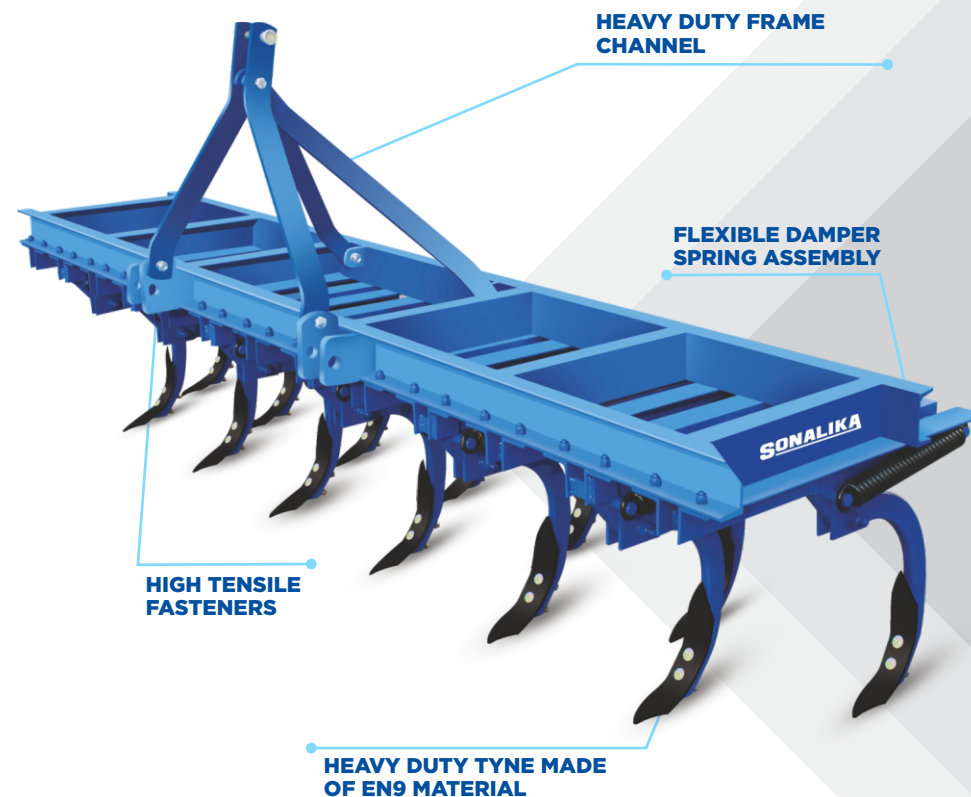

SONALIKA

INTERNATIONAL TRACTORS LIMITED

International Business Office: Teri School of Advanced Studies, Plot No.10, Institutional Area, Vasant Kunj, New Delhi-110070 (India)
 Phone: +91 11 66 45 5200 | Work: Jalandhar Road, Hoshiarpur - 146022, Punjab (India) | Phone: +91 1882 302220, 302221
 Fax: +91 1882 302293 | Email: exports@sonalika.com | URL: www.international.sonalika.com

Auth. Dealer