

REVERSIBLE MB PLOUGH












SALIENT FEATURES

- The plough is made from boron steel body
- Height adjustable drawbar
- Adjustment for working depth
- Reliable turnover mechanism
- Overload safety protection

REVERSIBLE MB PLOUGH

MB Plough is used for initial soil preparation for sowing seed or planting. Generally used for deep tillage of land, to help turn over the upper layer of the soil, bringing fresh nutrients to the surface, while burying weeds and remains of previous crop. It also aerates the soil, allows it to hold moisture better and is tough to withstand heavy loads.

TECHNICAL SPECIFICATIONS

 Model Name	 Length/ Width/ Height (mm)	 Under Beam Clearance (mm)	 Leg Size (mm)	 Inter Body Clearance (mm)	 Working Depth (mm)	 Tractor Power (HP)	 Working Width (mm)	 Weight (Kg. approx)
SL RP-2	1920x1230x1530	700	80x25	850	Hard Soil-254-355	60-75	600 ± 2	440
SL RP-3	2770x1360x1530	700	80x25	850	Soft and Medium Soil- 254-406	75-90	910 ± 2	560



STRONG TURNOVER MECHANISM FOR REVERSIBLE OPERATION




FURROW ANGEL ADJUSTMENT FOR BIGGER FURROWS



HEAVY DUTY DESIGN HELP TO PENETRATE IN FIELD EASILY



HEAVY DUTY FRAME DESIGN

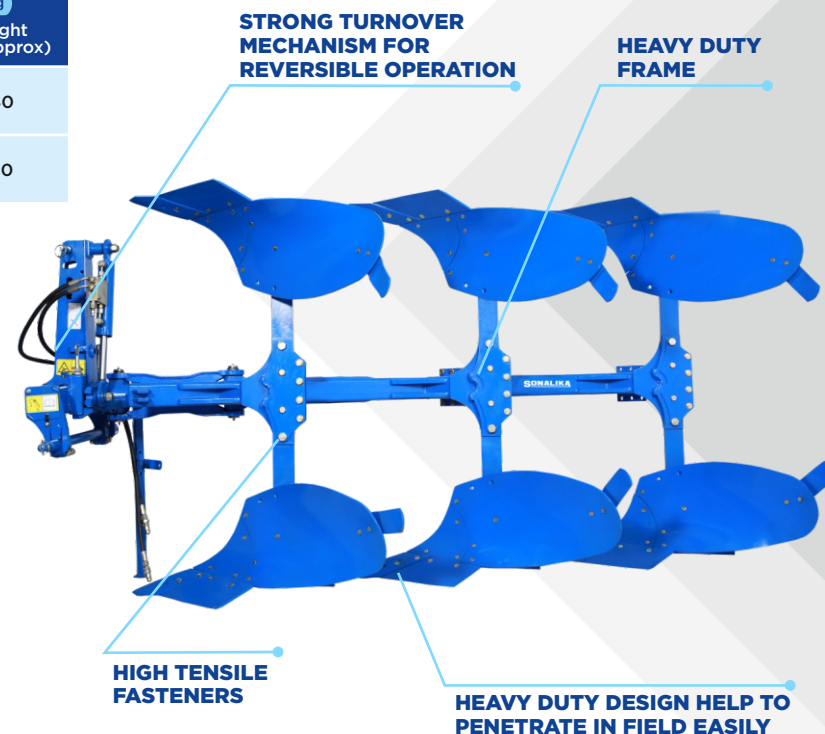

SONALIKA

INTERNATIONAL TRACTORS LIMITED

International Business Office: Teri School of Advanced Studies, Plot No.10, Institutional Area, Vasant Kunj, New Delhi-110070 (India)
 Phone: +91 11 66 45 5200 | Work: Jalandhar Road, Hoshiarpur - 146022, Punjab (India) | Phone: +91 1882 302220, 302221
 Fax: +91 1882 302293 | Email: exports@sonalika.com | URL: www.international.sonalika.com

Auth. Dealer