

ROTAVATOR

CHALLENGER















SALIENT FEATURES

- International quality boron steel blades
- High tensile fasteners
- Flexible spring damper assembly
- Heavy duty gear box
- ✓ Powder coated paint
- ✓ Ensures smooth operation in different soil types
- ✓ Provides ease of working in interculture operations
- ✓ Effective for puddling due to better churning of soil

CHALLENGER SERIES

Rotavator is secondary tool used in preparing Seed Beds, Stubby ploughing in specially farming vineyard gardens.

TECHNICAL SPECIFICATIONS

	 Model Name	 Length (mm)	 Width (mm)	 Height (mm)	 Size (In Feet)	 Tillage Width (mm)	 Gear Box	 Side Transmission	 Type of Blade	 No of Blades	 No. of Flange's	 Weight (Kg. Approx)	 Tractor Power (HP)
Challenger Series	SL-CS150	1815	1010	1110	5	1625	Multi Speed	Gear Drive	C & L Type	36	7	410	45-55
	SL-CS155	1993			5.5	1800				36	7	430	50-60
	SL-CS175	2067			6	1880				42	8	442	60-70
	SL-CS200	2319			7	2130				48	9	484	70-80
	SL-CS225	2571			8	2200				54	10	536	75-85
	SL-CS250	3010			9	2820				60	11	570	70-80
	SL-CS275	3230			10	3040				66	12	640	80-90



HEAVY DUTY GEARBOX
COMPATIBLE WITH HIGHER HP
TRACTORS UP TO 90HP




INTERNATIONAL
QUALITY BORON STEEL
ANTI WEAR BLADES



FLEXIBLE &
ADJUSTABLE
TRAILER SPRING



HEAVY DUTY
STRUCTURE

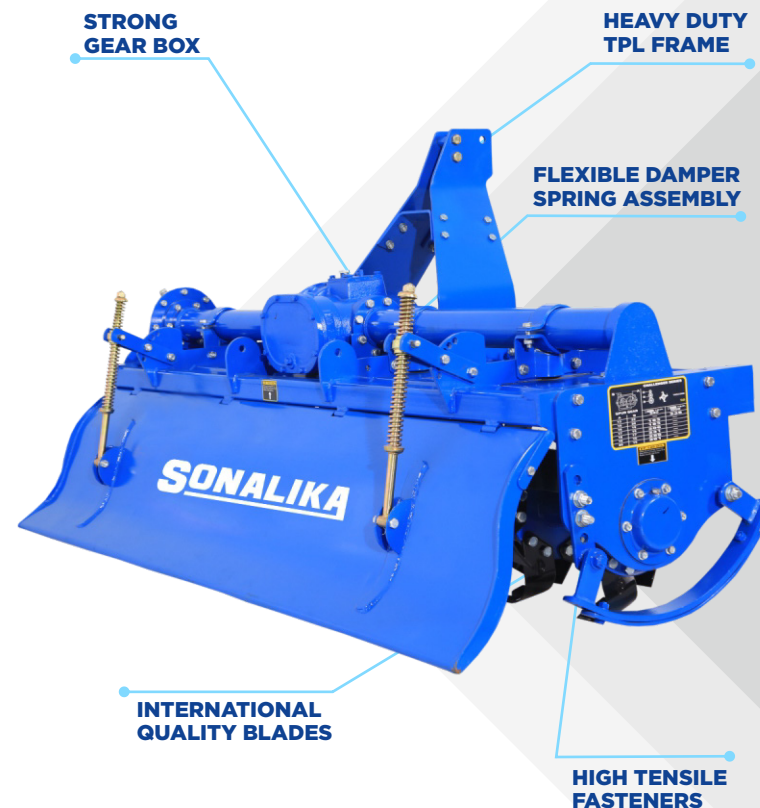

SONALIKA

INTERNATIONAL TRACTORS LIMITED

International Business Office: Teri School of Advanced Studies, Plot No.10, Institutional Area, Vasant Kunj, New Delhi-110070 (India)
Phone: +91 11 66 45 5200 | Work: Jalandhar Road, Hoshiarpur - 146022, Punjab (India) | Phone: +91 1882 302220, 302221
Fax: +91 1882 302293 | Email: exports@sonalika.com | URL: www.international.sonalika.com

Auth. Dealer