
SONALIKA

ROTAVATOR

MINI / HYBRID / XTRA SERIES

SALIENT FEATURES

- International quality boron steel blades
- High tensile fasteners
- Flexible spring damper assembly
- Heavy duty gear box
- Powder coated pain
- Ensures smooth operation in different soil types
- Provides ease of working in interculture operations
- Effective for puddling due to better churning of soil

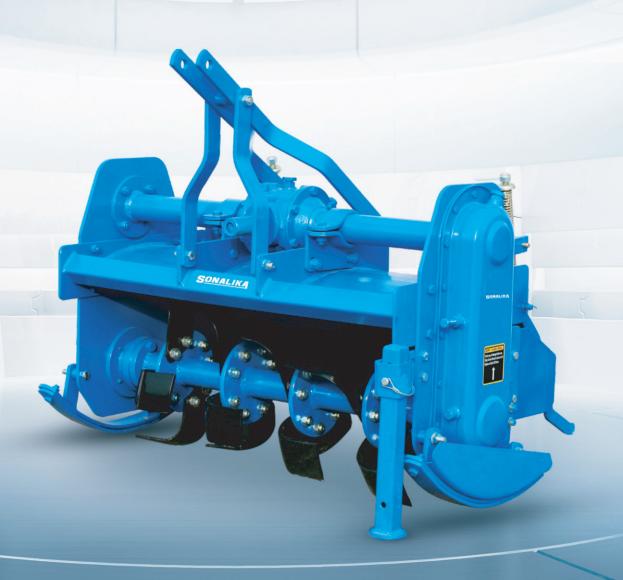

MINI / HYBRID / XTRA SERIES

Rotavator is secondary tool used in preparing Seed Beds, Stubby ploughing in specially farming vineyard gardens.

TECHNICAL SPECIFICATIONS

		Model Name	Length (mm)	₩idth (mm)	Height (mm)		Tillage Width (mm)	Gear Box	Side Transmission	Type of Blade	No of Blades	No. of Flange's	Weight (Kg. Approx)	Tractor Power (HP)
	Mini Series	SL-80	1046	682	949	3	900	Single	e Gear Drive	LTuna	16	4	186	15-25
		SL-100	1208	682	949	3.5	1059	Speed	Geal Dilve		20	5	202	20-30
	Hybrid Series	SL-120 (Single Speed)	1346	682	949	4	1200	Single Speed		L Type	24	6	225	20-35
		SL-120 (Multi Speed)	1346	682	949	4	1200	Multi Speed			24	6	236	25-35
	XTRA	SLX 90	1022	880	920	3	900	Single Speed	Gear Drive	С Туре	24	4	155	15-25
		SLX 105	1172	880	920	3.5	1050				30	5	170	20-30
		SLX120	1322	880	920	4	1200				36	6	182	20-35
		SLX 135	1472	880	920	4.5	1350				36	6	194	25-40
		SLX 150	1622	880	920	5	1500				42	7	205	25-40









20% LONGER LIFE THAN OTHER BLADES



POWDER COATED PAINT, GOOD FOR WET CONDITIONS AND EXCELLENT CORROSION RESISTANCE

SONALIKA

INTERNATIONAL TRACTORS LIMITED

International Business Office: Teri School of Advanced Studies, Plot No.10, Institutional Area, Vasant Kunj, New Delhi-110070 (India) Phone: +91 11 66 45 5200 | Work: Jalandhar Road, Hoshiarpur - 146022, Punjab (India) | Phone: +91 1882 302220, 302221 Fax: +91 1882 302293 | Email: exports@sonalika.com | URL: www.international.sonalika.com

Auth. Dealer