

SONALIKA

HEAVY DUTY TRACTOR RANGE «FOR YOUR FIELD»

WT 110 RX



High Torque 4 Cylinder
Turbo Engine



Advanced Hydraulic
3500Kg Lifting Capacity



12F+12R Synchro
Shuttle Transmission



- Spacious operator area
- Tilttable and telescopic hydrostatic steering



Eminent
Versatility,
Build & Style



**COST
EFFICIENT**
MECHANICAL TRACTORS











MADE OF
**REAL
STEEL**






**STRATEGIC
COLLABORATION
WITH
YANMAR**

HEAVY DUTY
TRACTOR RANGE
FOR YOUR FIELD

WT 110 RX




FEATURES	110
Model Description	SONALIKA 110
ENGINE 	
Engine Type	Turbocharged intercooled engine
HP Category	107
No. of Cylinders	4
Cubic Capacity (cc)	4087
Rated RPM	2200
Air Cleaner	2 Stage Dry Air Filter with Dust Scavenging System
Max Torque (Nm)	420 Nm
TRANSMISSION 	
Drive	4WD
Clutch	Double Clutch
Gearbox	12F+12R
Transmission	Synchro Shuttle Transmission
SPEED (FORWARD) 	
Maximum Speed (Km/Hr)	34.86
Minimum Speed (Km/Hr)	1.67
BRAKES 	
Brakes	Oil Immersed Brake
Type of Actuation	Hydraulically assisted
Parking Brake	Independent
DIFFERENTIAL LOCK 	
Differential Lock	Yes
PTO 	
PTO (RPM)	540/540E 540/1000 (optional)
PTO (Actuation)	Mechanical
STEERING 	
Steering	Tiltable & Telescopic Hydrostatic Steering
ELECTRICAL 	
Battery	12V, 110AH
Alternator	12V, 90Amp
Seven pin trailer socket	Yes
HYDRAULICS 	
3 Point Linkage	Quick Attach CAT-II
Hydraulic Lifting Capacity	3500 Kg
Auxiliary Hydraulic Circuit	2DA/2SA
SAFETY SWITCHES 	
Clutch Safety Switch	Yes
PTO Safety Switch	Yes
Neutral Safety Switch	Yes

FEATURES	110
CAPACITY (LTRS) (+/-5%) 	
Fuel Tank (Ltr)	117
TYRES 	
Front	380/85R24
Rear	460/85R34
DIMENSIONS & WEIGHT (+/-5%) 	
Weight (kg)	4085
Wheel Base (mm)	2375
Total Length (mm)	4315
Total Width (mm)	2255
Height (mm) up to Canopy	2690
Min Ground Clearance (mm)	470
OTHERS 	
Front Tow Hook	Yes, inbuilt in front weight
Front & Rear Weights	Front : 72 +(31*8) Rear : 40X2 (rear wheels)
Rear Hitch	Heavy Duty Ladder Hitch
ROPS	Yes
Canopy	Yes (Optional)
OPTIONAL 	
Bias tyre	Front : 14.9 x 24 Rear : 18.4 x 34

*Since product improvement is a continuous process, specification and details provided are subject to change without prior notice. E&OE, Please correlate with latest updates, accessories shown may not be part of standards product.

DEALER STAMP

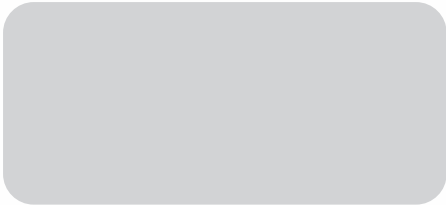

INTERNATIONAL TRACTORS LIMITED

International Business Office: Teri School of Advanced Studies, Plot No.10, Institutional Area, Vasant Kunj, New Delhi-110070 (India)
Phone: +91 11 66 45 5200 | Work: Jalandhar Road, Hoshiarpur - 146022, Punjab (India) | Phone: +91 1882 522220, 522221
Fax: +91 1882 522222 | Email: exports@sonalika.com | URL: www.international.sonalika.com