

ACCOLADES AND CREDENTIALS



AMONG
TOP 6 TRACTOR
MANUFACTURERS
GLOBALLY*



AMONG
TOP 3 TRACTOR
COMPANIES
IN INDIA



EMINENT
PRESENCE IN
130+ COUNTRIES



WORKFORCE OF
5,500+ DEDICATED
EMPLOYEES WITH
400+ ENGINEERS
IN R&D



JOINT VENTURE
WITH **YANMAR**
(JAPAN)



PRODUCTION
CAPACITY OF
300,000 TRACTORS
PER YEAR

SONALIKA

INTERNATIONAL TRACTORS LIMITED

International Business Office: Teri School of Advanced Studies, Plot No.10, Institutional Area,
Vasant Kunj, New Delhi-110070 (India) | Phone: +91 11 66 45 5200

Work: Jalandhar Road, Hoshiarpur - 146022, Punjab (India) | Phone: +91-01882-522220/ 522221 | Fax: +91- 01882-522222

Email: exports@sonalika.com | URL: www.solistractors.com/www.solisworld.com

Follow us on:

[f https://www.facebook.com/SonalikaInternational](https://www.facebook.com/SonalikaInternational) [t https://twitter.com/SonalikaTractor](https://twitter.com/SonalikaTractor)

[in https://www.linkedin.com/company/sonalika-tractors-international/](https://www.linkedin.com/company/sonalika-tractors-international/) https://www.instagram.com/sonalika_tractor_international/?hl=en

SONALIKA

90 HP / 105 HP

HEAVY DUTY
TRACTOR RANGE
«FOR YOUR FIELD»



SWITCH TO NEW-AGE PALM FARMING

www.international.sonalika.com



**POWERFUL
AND VERSATILE**

Agri-Professional

90 HP / 105 HP

- POWERFUL ENGINE
- TOUGHER & MODERN TRANSMISSION
- HIGH LIFTING POWER
- EPICYCLIC REDUCTION
- INDEPENDENT CLUTCH FOR PTO
- DUAL PTO SPEED
- HYDRAULIC ASSISTED BRAKES

SONALIKA



www.international.sonalika.com


PROVEN PERFORMANCE

90 HP / 105 HP**4 Cylinder high output engine with Turbo Charged**

Formerly, heavy duty works like transport, tillage or ploughing slow down your engine.

Now, **Sonalika tractor comes with engine gaining high trust globally with it's unique power curve, more torque under load & especially designed with Individual Cylinder Heads**

- Giving you the extra power you need for toughest applications.
- Individual Cylinder Heads reduce the repair cost & provide Ease of maintenance.

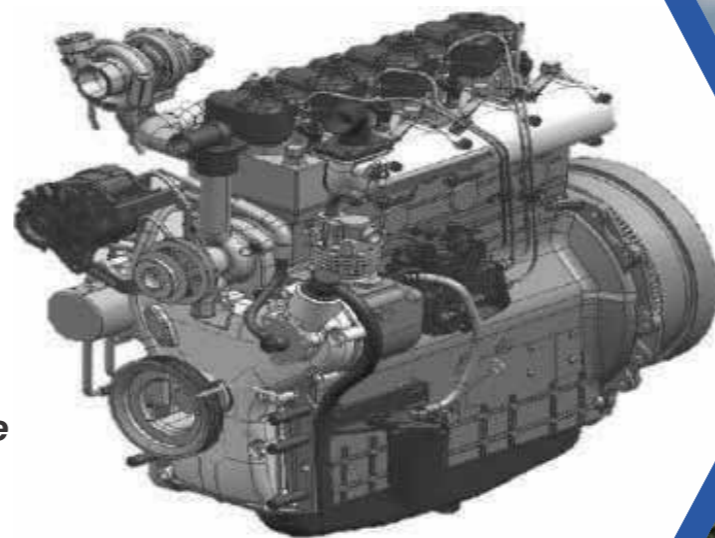

POWERFUL
4 CYLINDER
ENGINE



HIGH BACKUP
TORQUE



LOW
VIBRATION



CYLINDERS
WITH
WET LINER



UNMATCHED PERFORMANCE



90 HP / 105 HP

Synchromesh Transmission W/Shuttle


Forward/Reverse Synchro Shuttle : **Frequent Direction Change Provision**

With latest synchromesh technology : **Smooth and soundless operation**


Proven for toughest conditions : **Long components life and lesser service cost**

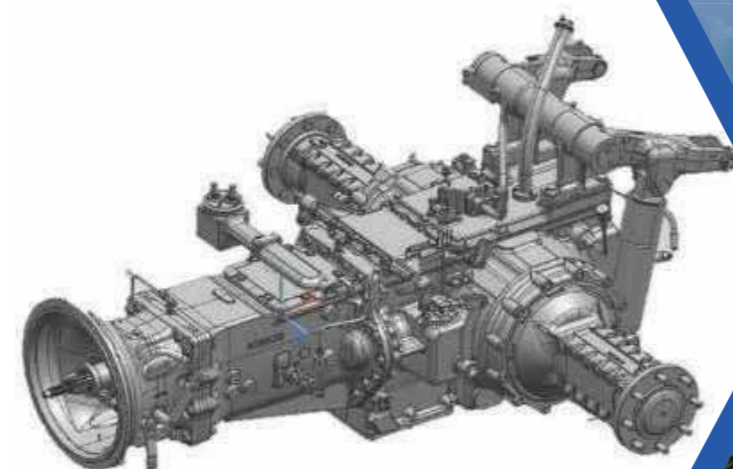


SYNCHROMESH
TRANSMISSION



RELIABLE
DRIVE LINE



CREEPER
SPEED OPTION



DOUBLE
CLUTCH




POWERFUL AND PRECISE LIFT

90 HP / 105 HP


Heavy Duty Lift Capacity

Solis 90 – 2500kg and Solis 105 – 3500 kg) : **Capable to work with all implements**


Fine Tune drop rate : **Less wear and tear of implements and Long components life**




MITA
HYDRAULICS



AUTO LIFT



HEAVY LIFTING
CAPACITY



2DA AUXILIARY
HYDRAULIC CIRCUIT



EPICYCLIC REDUCTION

MORE STRENGTHENED



Multiple Kinematic Combinations
Minimal impact on crown wheel pinion – Long components life & Less maintenance
Capable to carry heavy loads – Suitable for various applications and high productivity

INDEPENDENT CLUTCH FOR PTO

INCREASE PRODUCTIVITY & OPERATOR COMFORT



Independent lever for PTO operation
PTO shaft is controlled with a separate lever - Ease of operation
Improve productivity and saves time - Financial benefit to operator
Less Wear and tear of components - Low service cost

DUAL PTO SPEED

EFFICIENT



Ground Speed PTO
Suitable for PTO driven trailers which provides more power during haulage in muddy condition.
Option for Economical PTO
540E PTO RPM at lower Engine RPMs – Lesser fuel consumption and high torque with various applications i.e. fertilizer spreader & sprayer etc.

HYDRAULIC ASSISTED BRAKES

EFFICIENT BRAKING



- Hydraulic Assisted Brakes provide more comfort and efficient braking during tough conditions i.e. heavy haulage at terrains

FULL OPEN & METAL HOOD

- **Full Opening hood**
- **Easy Servicing** to engine, pump, pipes, electrical giving easy access for servicing
- **Strong and durable** metallic hood prevents from dings and dent



AERODYNAMIC GLOBAL STYLING



- **Sloping hood design**
- **Better visibility** at front so that you can **see obstacles more easily and work worry-free**

AUXILIARY OUTPUTS



- No of Coupler: **4 at Rear**
- **Quick attach couplers** for easy attach & detach
- Suitable for **hydraulic operated implements and fitment of loader/dozer**

HYDROSTATIC STEERING

- **Hydraulic power steering** provides fatigue free operating
- **Better sensitivity** & control
- **Feel good steering** position optimally designed & located to provide comfort to customers



SAFETY FEATURES

GLOBAL STANDARD DRIVER SEAT

Provides more comfort and safety to operator



ROLL OVER PROTECTION SYSTEM

Protects the operator while overturned

DIVERSE APPLICATIONS FOR VARIOUS TASKS



**SONALIKA 90 PERFORMING IN
PADDY FIELDS**
WHICH ELEVATES
THE PRODUCTIVITY WITH
ITS PERFORMANCE



**SONALIKA 90 SHOWING ITS
STRENGTH WITH
BACK PUSHER**



SONALIKA








**SONALIKA 90
PERFORMING AT
PALM
ESTATES,
FOR HAULING**








www.international.sonalika.com

90 HP








TECHNICAL SPECIFICATION





FEATURES		90	
Model Description		SONALIKA 90	
ENGINE 			
Engine Type	4 Cylinder Turbo Charged Engine		
HP Category	90		
No. of Cylinders	4		
Aspiration	Turbo Charged		
Cubic Capacity (cc)	4087		
Bore/Stroke (mm)	105/118		
Rated RPM	2200		
Air cleaner	Dry Air Cleaner with Clogging Sensor Precleaner		
Max Torque (Nm)	339(+/-5%)Nm @1400(+/-100) RPM		
Exhaust	Underhood Updraft		
TRANSMISSION 			
Drive	4WD		
Clutch	Double Clutch		
Gearbox	12F+12R		
Transmission	Synchronmesh		
SPEED (FORWARD)			
Maximum Speed (Km/Hr)	33.73@2200 ERPM		
Minimum Speed (Km/Hr)	1.64@2200 ERPM		
Driver Seat	Adjustable		
BRAKES 			
Brakes	Oil Immersed Brakes		
Type of actuation	Mechanical		
Parking Brake	Independent		
DIFFERENTIAL LOCK			
Differential lock	Yes, Foot Operated		
PTO 			
PTO (rpm)	540/540E		
PTO (Actuation)	Mechanical		
STEERING 			
Steering	Power		
ELECTRICAL 			
Battery	12V, 110AH		
Alternator	12V, 36Amps		
Seven pin trailer socket	Yes		
HYDRAULICS 			
Position Control	Yes		
Automatic Draft & Depth Control	Yes		
3 point linkage	CAT-II		
Stay Bars	Adjustable		

FEATURES	
Hydraulic lifting capacity	2500 kg
Auxiliary hydraulic circuit	2DA/2SA
SAFETY SWITCH 	
Clutch Safety Switch	Yes
PTO Safety Switch	Yes
Neutral Safety Switch	Yes
CAPACITY (LTRS)(+/-2%) 	
Fuel tank (Ltr)	64
TYRE 	
Front	12.4-24
Rear	18.4-30
DIMENSION & WEIGHT(+/-5%) 	
Weight(kg)	3043 (Ballasted)
Wheel Base (mm)	2350
Total Length (mm)	4330
Total Width (mm)	1975
Height (mm) up to ROPS	2762
Min. Ground Clearance (mm)	405
Front Track (mm)	1628 (with Std. Width)
Rear Track (mm)	1508 (with Std. Width)
OTHERS 	
Fuel Indicator gauge	Yes
Registration Plate with light	Yes
Front Tow Hook	Yes, inbuilt in front weight
Front & Rear Weights	Front- 4*30kg + 4*25kg
	Rear- 1X34 kg (Each Side)
Drawbar	Swinging Drawbar
ROPS	Yes
OPTIONAL FEATURES	
Cabin	HVAC
Front Mudguard	Yes
Trailer Brake	HTB/ATB

*Data and specifications are subject to change without any advance notice due to continuous product improvement and development. All Dimensions are with standard tyres.

* T&C apply.

FEATURES	
105	
ENGINE 	
Engine Type	4105IVLT
HP Category	105
No. of Cylinders	4
Aspiration	Turbo Charged & Intercooler
Bore/ Stroke(mm)	105/118
Cubic Capacity (cc)	4087
Rated RPM	2200
Air Cleaner	Two Stage dry filter with pre cleaner & scavenging
Max Torque (Nm)	420(±5%) Nm@ 1400(+/-100) RPM
Exhaust	Underhood Updraft
TRANSMISSION 	
Drive	4WD
Clutch	Double Clutch
Gearbox	12F+12R
Transmission	Synchromesh
SPEED (FORWARD)	
Maximum Speed (Km/Hr)	35 @ 2200 ERPM
Minimum Speed (Km/Hr)	1.6@ 2200 ERPM
Driver Seat	Adjustable
BRAKES 	
Brakes	Oil Immersed Brake
Type of Actuation	Hydraulically assisted
Parking Brake	Independent
DIFFERENTIAL LOCK	
Di erential Lock	Yes
PTO 	
PTO (RPM)	540/540E
PTO (Actuation)	Mechanical
STEERING 	
Steering	Power Steering
ELECTRICAL 	
Battery	12V, 110AH
Alternator	12V, 90Amp
Seven pin trailer socket	Yes
HYDRAULICS 	
Position Control	Yes
Automatic Draft & Depth Control	Yes
3 Point Linkage	CAT-II
Hydraulic Lifting Capacity	3500Kg.
Auxiliary Hydraulic Circuit	2DA/2SA

FEATURES		105
SAFETY SWITCHES 		
Clutch Safety Switch	Yes	
PTO Safety Switch	Yes	
Neutral Safety Switch	Yes	
CAPACITY (LTRS) (+/-5%)		
Fuel Tank (Ltr)	117	
TYRES 		
Front	380/85R24	
Rear	460/85R34	
DIMENSIONS & WEIGHT (+/-5%) 		
Weight (kg)	4085	
Wheel Base (mm)	2376	
Total Length (mm)	4310	
Total Width (mm)	2225	
Height (mm) up to Canopy	2816	
Min Ground Clearance (mm)	455	
Front Track (mm) (Standard)	1762	
Rear Track (mm) (Standard)	1724	
OTHERS 		
Fuel Indicator Gauge	Yes	
Registration Plate with Light	Yes	
Front Toe Hook	Yes, inbuilt in front weight	
Front & Rear Weights	Front-72+8X31 Kg, Rear- 1X40 Kg on each wheel	
Drawbar	Swinging Drawbar	
ROPS	Yes	
Cabin	HVAC (Optional)	

*Data and specifications are subject to change without any advance notice due to continuous product improvement and development, All Dimensions are with standard tyres.

* T&C apply.

SONALIKA

TECHNICAL SPECIFICATION

105 HP

www.international.sonalika.com