SONALIKA

THE TOUGHEST PERFORMER FOR YOUR FIELD

50 HP

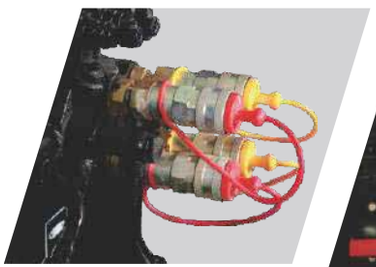

SWIFT SHIFT TRANSMISSION

- AGILE HIGH BACKUP TORQUE ENGINE
- 8F+2R SWIFT SHIFT TRANSMISSION®
- HEAVY LIFT CAPACITY
- EASY FRONT AND LOADER ATTACHMENT
- HEAVY DUTY 2WD/4WD

NO.1 TRACTOR EXPORTER FROM INDIA

COST EFFICIENT MECHANICAL TRACTORS

MADE OF REAL STEEL

STRATEGIC COLLABORATION WITH YANMAR

THE TOUGHEST PERFORMER FOR YOUR FIELD

50 HP

SONALIKA

FEATURES	S 50
Model Description	Sonalika-50
ENGINE	
Engine Type	Three Cylinder Natural Aspirated Engine
HP Category	50
No. of Cylinders	3
Aspiration	Natural
Cubic Capacity (cc)	3067
Rated RPM	2100
Air cleaner	Dry Air Cleaner with Clogging sensor
Cold Start	Standard
Max Torque (nm) (+/-5%)	205@1200 ±100RPM
Exhaust	Underhood Downdraft silencer Underhood Upward
TRANSMISSION	
Drive	2WD/4WD
Clutch	Dual Clutch
Gearbox	8F+2R
Front Axle	4WD
Transmission	Swift Shift
SPEED (FORWARD)	
Maximum Speed (Km/Hr)	29.94@2100
Minimum Speed (Km/Hr)	2.27@2100
BRAKES	
Brakes	Oil Immersed Brake
Type of actuation	Mechanical
Parking Brake	Independent Type
DIFFERENTIAL LOCK	
Differential lock	Yes, Foot Operated
PTO	
PTO (rpm)	540
PTO (actuation)	Mechanical
STEERING	
Steering	Power
ELECTRICAL	
Battery	12V, 88 Ah
Alternator	12V, 90 Amp
Seven pin trailer socket	Standard
HYDRAULICS	
3 point linkage	CAT-II
Stay Bars	Adjustable
Hydraulic lifting capacity	1600 kg
Auxiliary hydraulic circuit	2DA
Lift rods	Standard

FEATURES	S 50
SAFETY SWITCH	
Clutch Safety Switch	Standard
PTO Safety Switch	Standard
Neutral Safety Switch	Standard
CAPACITY (LTRS)(+/-5%)	
Fuel tank (Lit)	65
TURNING RADIUS	
Without Brakes (m)	3.7
TYRE	
Front	9.5-20
Rear	13.6-28
DIMENSION & WEIGHT(+/-5%)	
Weight(kg)	2780
Wheel Base (mm)	2175
Total Length (mm)	3936
Total Width (mm)	1785
Height (mm) Up to ROPS	2488
Min Ground Clearance (mm)	293
Front Track (mm)	1535
Rear Track (mm)	1420
OTHERS	
Fuel Indicator gauge	Standard
Front Tow Hook	Inbuilt in front weight
Front weights with std. Ballast	30X2+25X4
Trailer Hitch	Swinging Drawbar
ROPS	Standard
OPTIONAL FEATURES	
Tyres (Radial Tyre)	Front 250/85R20, Rear 340/85R28
Cabin	Optional
2WD Front Tyre	7.5-16

*Since product improvement is a continuous process, specification and details provided are subject to change without prior notice. E&OE, Please correlate with latest updates, accessories shown may not be part of standard product.

DEALER STAMP

SONALIKA S50 AF

INTERNATIONAL TRACTORS LIMITED

International Business Office: Teri School of Advanced Studies, Plot No.10, Institutional Area, Vasant Kunj, New Delhi-110070 (India)
Phone: +91 11 66 45 5200 | Work: Jalandhar Road, Hoshiarpur - 146022, Punjab (India) | Phone: +91 1882 302220, 302221
Fax: +91 1882 302293 | Email: exports@sonalika.com | URL: www.sonalika.com/www.solisworld.com