

POLY DISC HARROW



SALIENT FEATURES









- Heavy duty disc to absorb sudden impact
- Sealed bearing increases life & reduces maintenance
- Heavy duty reinforced pipe frame
- Robust bearing hub mechanism & bearings
- Superior powder coated paint

POLY DISC HARROW

SONALIKA

Disc harrow is used to till the soil where crops are to be planted. It is also used to chop up unwanted weeds or crop remainders. The discs are also offset so that they are not parallel with the overall direction of the implement. This arrangement ensures that the discs will repeatedly slice any ground to which they are applied, in order to optimize the result. The concavity of the discs as well as their offset angle causes them to loosen and lift the soil that they cut.

TECHNICAL SPECIFICATION

 Model Name	 No. of Discs	 Disc to Disk (mm)	 Disc Diameter (mm)	 Max Depth (inch)	 3 Point Linkage	 Weight (Kg. approx)	 Tractor Power (HP)
SL-PHD-8	7	265	660X5T	8"	Cat-II	600	75-90



STRONG STRUCTURE
TO USE MACHINE
IN TOUGH CONDITION
WITHOUT WEAR AND TEAR




SG IRON GRADE
BEARING HUB WITH
GREASING ARRANGEMENT
TO AVOID DIRT AND
MUD ENTRY



BETTER QUALITY
BORON STEEL
WITH 40-48 HRC
TOUGHNESS



HEAVY DUTY
GANG AXLE FOR
TOUGHEST
OPERATION

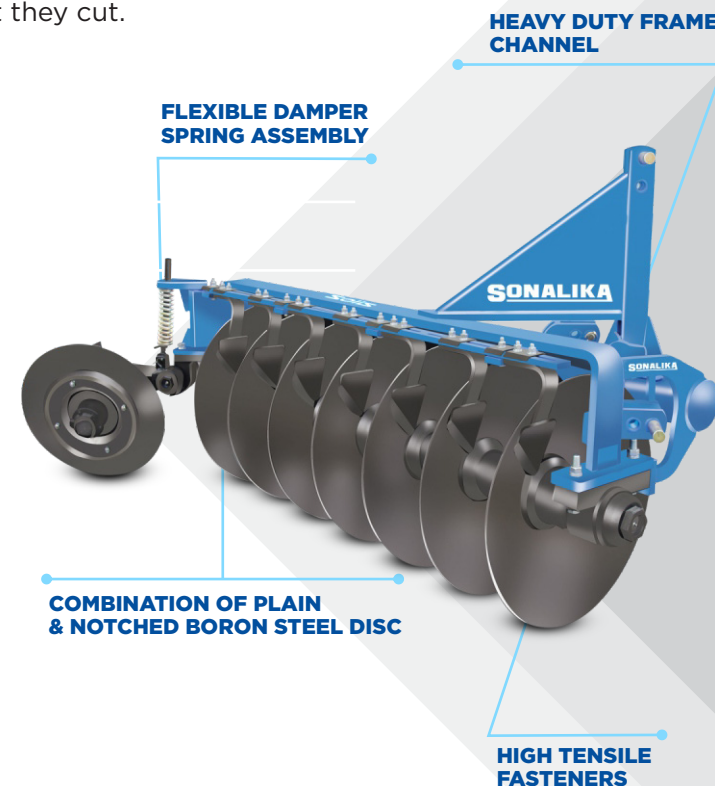

SONALIKA

INTERNATIONAL TRACTORS LIMITED

International Business Office: Teri School of Advanced Studies, Plot No.10, Institutional Area, Vasant Kunj, New Delhi-110070 (India)
Phone: +91 11 66 45 5200 | Work: Jalandhar Road, Hoshiarpur - 146022, Punjab (India) | Phone: +91 1882 302220, 302221
Fax: +91 1882 302293 | Email: exports@sonalika.com | URL: www.international.sonalika.com

Auth. Dealer